

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/01186</b> (43) International Publication Date: 6 January 2000 (06.01.00)
<p>(21) International Application Number: PCT/SE99/01080</p> <p>(22) International Filing Date: 16 June 1999 (16.06.99)</p> <p>(30) Priority Data: 9802295-7 26 June 1998 (26.06.98) SE</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventors: HEDBY, Gunnar, Banérgatan 9, S-582 32 Linköping (SE). KARLSSON, Mats; Aftonsgatan 4, S-589 53 Linköping (SE). BALCK, Kenneth, Bo, Gustaf; Opphemsgatan 2, S-582 37 Linköping (SE).</p> <p>(74) Agents: BERG, S., A. et al.; Albihs Patentbyrå Stockholm AB, P.O. Box 5581, S-114 85 Stockholm (SE).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>
<p>(54) Title: A METHOD AND APPARATUS FOR ALLOCATING CHANNELS IN A MOBILE TELECOMMUNICATIONS SYSTEM SUPPORTING BOTH PACKET AND CIRCUIT SWITCHED TRAFFIC</p> <div data-bbox="341 1197 1218 1512"> </div> <p>(57) Abstract</p> <p>The present invention relates to the efficient traffic handling in TDMA systems using both circuit switched and packet switched traffic. The method according to the invention comprising the following steps: specifying a maximum number of channels that may be allocated to packet switched connections for each frequency; specifying a maximum number of connections that may be allocated to one channel; when a packet switched connection is requested, performing the following steps: checking if the maximum number of channels have been allocated and, if not, allocating the available channels to the connection; if more channels were requested, allocating other channels among the channels that may be allocated to packet switched connections to the requested packet switched connection. A control node in a mobile telecommunications network comprising programs for performing said method is also described.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A METHOD AND APPARATUS FOR ALLOCATING CHANNELS IN A MOBILE TELECOMMUNICATIONS SYSTEM  
SUPPORTING BOTH PACKET AND CIRCUIT SWITCHED TRAFFIC

The present invention relates to mobile telecommunications networks and in particular to the allocation of channels in such a network when both packet switched and circuit switched traffic is used in the network.

5

**Description of Related Art**

In many mobile telephony systems, for example the Global System for Mobile communication (GSM), protocols exist both for circuit switched and packet switched communication.

10

In circuit switched speech systems one or more physical channels are allocated to each connection. Each channel is assigned to one connection only, until the information transfer on this connection is completed. In GSM, the High Speed Circuit Switched Data (HSCSD) protocol enables the allocation of several physical channels to one connection, and is mainly used for transfer of large amounts of data.

15

In packet switched traffic data communication is often very intermittent and the information to be transferred occurs in bursts of varying length. During a burst, the bandwidth demand may be very high, whereas between bursts it may be zero. To utilize each channel optimally, a number of packet communication connections often share a number of physical channels.

20

The channel or channels assigned to a packet switched connection are assigned to a particular connection only when information is being transmitted on the connection. The rest of the time, the channel or channels can be used for the other connections assigned to the same channel or channels. The effective transmission rate for each connection is of course reduced if many connections share the same physical channels. Therefore, from a user's point of view it is beneficial not to share a channel with other users.

25

30

The circuit switched connections often carry speech, whereas the packet switched connections are mostly used for data. Therefore, the circuit switched connections must be transmitted in real time, while this is not so critical for the packet switched connections. Therefore, circuit switched connections are usually given a higher priority than packet switched connections. This means that, if the total number of channels requested is higher than the total number of available channels, packet switched connections may be disconnected to enable a circuit switched connection.

Depending on the traffic demand in the cell the number of channels required for each type varies with time. Therefore, the dynamic allocation of resources between circuit switched and packet switched traffic should be possible. Since the total number of channels in a cell is fixed, the number of channels allocated to each type of traffic has to be balanced, especially when the total traffic demand in a cell is high.

European Patent Specification EP 0 831 669 A2 describes a method for controlling the load of a Code Division Multiple Access (CDMA) system in which circuit switched and packet switched traffic occurs. The number of channels that may be allocated to each type of traffic can be set dynamically in dependence of the demand for each type of circuit switched and packet switched traffic, respectively.

The solution described in EP 0 831 669 A2 relates to the overall distribution of resources between circuit switched and packet switched networks. It does not, however, concern itself with optimizing the utilization of the channels that may be allocated to each of the two types of traffic.

### Object of the Invention

It is an object of the present invention to enable the efficient traffic handling in TDMA systems using both circuit switched and packet switched traffic.

### Summary of the Invention

This object is achieved according to the invention by a method of allocating channels in a mobile telecommunications system in which packet switched and circuit switched traffic may be used, said method comprising the following steps:

- 5     - specifying a maximum number of channels ( $TS_{MAX}$ ) that may be allocated to packet switched connections for each frequency;
- specifying a maximum number of connections ( $NU_{MAX}$ ) that may be allocated to one channel;
- when a packet switched connection is requested, performing the following steps:
  - 10     - checking if the maximum number ( $TS_{MAX}$ ) of channels have been allocated and, if not, allocating the available channels to the connection;
  - if more channels were requested, allocating other channels among the channels that may be allocated to packet switched connections to the requested packet switched connection.

15

The object is also achieved by a control node in a mobile telecommunications network comprising programs developed to perform said method.

The method and control node according to the invention ensure that a certain number of channels are always reserved for circuit switched traffic, and at the same time guarantees that a reasonable number of packet switched connections share each of the channels that may be used for packet switched connections

According to a first embodiment, if the maximum number ( $TS_{MAX}$ ) of channels have  
25     been allocated, it is checked if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of the channels among the channels that may be allocated to packet switched connections, and, if not, the channels having the fewest connections will be assigned to the requested connection.

If the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of said channels, another frequency is selected.

5 According to a second embodiment, if the maximum number ( $TS_{MAX}$ ) of channels have been allocated, it is checked if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of the channels among the channels that may be allocated to packet switched connections, and, if not, it is checked if the requested number of channels can be allocated to the connection and, if so, the channels having the fewest connections are assigned to the requested connection. If the requested  
10 number cannot be allocated to the connection, another frequency is selected.

In both embodiments, the steps are preferably performed for each frequency according to a priority order list, until a frequency is found on which the connection request can be fulfilled, or until the last frequency has been examined.

15

If no frequency is found on which the connection request can be fulfilled, the best possible assignment of channels is made, the connection is denied or the connection is assigned to channels that may not normally be allocated to packet switched connections.

20

The maximum number of channels ( $TS_{MAX}$ ) that may be allocated to packet switched connections and/or the number of connections ( $NU_{MAX}$ ) that may be assigned to each channel may be set individually for each frequency. This enables the establishment of a limited number of packet switched connections with a high  
25 bandwidth without increasing the total number of channels that may be assigned to packet switched connections too much.

If a circuit switched connection is requested for which no channels are available among the channels that may not be used for packet switched connections and, the

necessary number of channels that may be used for packet switched connections are allocated to the circuit switched connection.

One or more packet switched connections may be disconnected to make idle channels for the circuit switched connection.

- 5 This ensures that the circuit switched connections are always given a higher priority than the packet switched connections, which do not require real-time communication.

### **Brief Description of the Drawings**

- 10 The present invention will be described in more detail in the following, by way of preferred embodiments, and with particular reference to the drawings, in which Figure 1 illustrates the communication between a mobile terminal and a base station terminal in a TDMA system;
- Figure 2 is a flow chart of the inventive method;
- 15 Figures 3A-3E illustrate the use of the inventive method for allocating channels to one frequency.

### **Detailed Description of Embodiments**

- Figure 1 illustrates the communication between a mobile terminal 1 and a base station 3 in a mobile telecommunications system according to TDMA. A number of channels, are transmitted in time slots on the same frequency. In the Figure, eight time slots, corresponding to eight physical channels, are transmitted on the same frequency. The base station 3 is controlled by a base station controller 5, through which it is connected to a telecommunications network 7. This description is, however, only concerned with the communication between the mobile terminal 1 and the base station 3.
- 20
- 25

A circuit switched connection is assigned one or more physical channels, and occupies this channel or these channels alone for the duration of the connection. A



packet switched connection is assigned one or more physical channels, which it shares with other packet switched connections.

In the discussion below the following definitions are used:

5      $NU_{MAX}$ : The maximum number of packet switched connections that can be accommodated for each time slot.

$TS_{MAX}$ : The maximum number of time slots on one frequency that may be allocated for packet switched connections. If the  $TS_{MAX}$  criterion is fulfilled for a frequency, this means that at least this number of time slots on this  
10     frequency is allocated to packet switched connections.

Area     The area criterion is fulfilled for a given frequency if there are at least  $NU_{MAX}$  connections assigned to all the channels that may be allocated to packet switched connections on that frequency.

15     Both  $NU_{MAX}$  and  $TS_{MAX}$  may be given different values for different frequencies. This may be used to make the system more flexible. For example, the value for  $TS_{MAX}$  may be set relatively low for most frequencies, while a few frequencies may have a higher  $TS_{MAX}$  to enable packet switched connections with higher bandwidth on these few frequencies.

20      $NU_{MAX}$  and  $TS_{MAX}$  are used together to determine when a new frequency should be selected for new packet switched connections to be set up. They may be set by the operator and may be changed when the traffic situation changes.

25     Two fundamental assumptions are made, which are true for most TDMA systems:

- 1) A priority order has been defined for the allocation frequencies to circuit switched and packet switched traffic, respectively.
- 2) In the case of congestion, circuit switched traffic has a higher priority than packet switched traffic. This means that, if more than the available number of channels

are requested a channel used for packet switched connections may be pre-empted to make room for a circuit switched connection.

5 If  $TS_{MAX}$  has different values for different frequencies, different priority lists may be used. For example, the first frequency examined may always be the frequency for which  $TS_{MAX}$  is equal to the number of channels requested.

Figure 2 is a flow chart of the method according to the invention. In the initial situation all channels are either idle or used for circuit switched connections.

- 10 Step S1: A packet switched connection utilizing a number N of channels is requested.
- Step S2: Select the first frequency in the above mentioned priority list.
- Step S3: Is the  $TS_{MAX}$  criterion fulfilled for this frequency? If no, go to step S4; if yes, go to step S5.
- 15 Step S4: Allocate the channels that may be allocated to packet switched connections and that are not currently allocated to any connection on this frequency to the connection. If more channels are requested, go to step S6, otherwise, end of procedure.
- Step S5: Is the Area criterion fulfilled for this frequency? If no, go to step S6; if yes, go to step S7.
- 20 Step S6: Assign the requested number of channels on this frequency to the packet switched connection, or, if the number of channels requested is higher than  $TS_{MAX}$ , assign  $TS_{MAX}$  channels. The channels are selected as the ones that have the fewest connections allocated to them among the ones already used for packet switched connections. End of procedure.
- 25 Step S7: Is this the last frequency in the priority list? If yes, go to step S8, if no, go to step S9.
- Step S8: Make the best possible assignment of channels.
- Step S9: Select the next frequency in the priority list as the current frequency.
- 30 Go to step S3.

In step S8, that is, if the  $TS_{MAX}$  and the Area criteria are fulfilled for all frequencies, alternative actions are possible. In the flow chart it has been assumed that the connection is assigned to channels already having more than  $NU_{MAX}$  connections assigned to them. It would also be possible to deny the connection altogether, to guarantee a minimum bandwidth to each connection actually set up. A third possibility would be to assign channels that may not normally be used for packet switched connections to the connection.

Figures 3A-3E illustrate the allocation of channels according to the procedure described above. In these figures  $TS_{MAX}$  is set to four and  $NU_{MAX}$  is set to three. This means that, of the eight channels available on the frequency shown, four may be allocated to packet switched connections. Three connections may share one physical channel before it will be considered to allocate a newly requested connection to a new frequency.

Figure 3A shows the situation when there is only one connection on the frequency. Two channels have been allocated to the connection, as indicated by the two boxes with diagonal shading.

Figure 3B shows the situation after a second connection has been established. Three channels have been assigned to this connection, as indicated by three boxes with vertical shading. Since fewer than  $TS_{MAX}$  (that is, four) channels were allocated to packet switched data before this connection was set up, the connection uses the two channels that were not previously used and shares one channel with the first connection.

Figure 3C shows the situation after the establishment of a third connection using four time slots. Since all the four channels allocated to packet switched connections already had been assigned, a check was made to see if the Area criterion was ful-

filled, that is, if the maximum number of connections had already been assigned to each channel. Since this was not the case, all the four channels of the frequency that may be allocated to packet switched connections have been allocated to the connection, as indicated by the dotted shadow squares.

5

Figure 3D shows the situation after two more one-channel connections have been allocated. The time slots used are shown as black squares. Now all the channels except one have the maximum number of connections assigned to them.

If a connection request for two or more channels is made at this stage, there are two alternatives:

10

1) The connection may be set up on this frequency, which means that on two channels there will be one more than  $NU_{MAX}$  (that is, three) connections. This is the situation shown in Figure 3E.

15

2) Another frequency may be selected for the new connection, since it cannot be set up on this frequency without violating the Area criterion.

The functions described above may be implemented as software packages included in a node in the network. A separate node may be included, or the functions may be implemented in an existing node, for example, the base station controller 5 shown in

20

Figure 1.

## Claims

1. A method of allocating channels in a mobile telecommunications system in which packet switched and circuit switched traffic may be used, characterized by the following steps:
  - specifying a maximum number of channels ( $TS_{MAX}$ ) that may be allocated to packet switched connections for each frequency;
  - specifying a maximum number of connections ( $NU_{MAX}$ ) that may be allocated to one channel;
  - when a packet switched connection is requested, performing the following steps:
    - checking if the maximum number ( $TS_{MAX}$ ) of channels have been allocated and, if not, allocating the available channels to the connection;
    - if more channels were requested, allocating other channels among the channels that may be allocated to packet switched connections to the requested packet switched connection.
2. A method according to claim 1, comprising the subsequent step of, if the maximum number ( $TS_{MAX}$ ) of channels have been allocated: checking if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of the channels among the channels that may be allocated to packet switched connections, and, if not, allocating the channels having the fewest connections to the requested connection.
3. A method according to claim 2, wherein, if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of said channels, another frequency is selected.
4. A method according to claim 1, comprising the subsequent step of, if the maximum number ( $TS_{MAX}$ ) of channels have been allocated:

checking if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to each of the channels among the channels that may be allocated to packet switched connections, and, if not, checking if the requested number of channels can be allocated to the connection and, if so, allocating the channels having the fewest connections to the requested connection.

5  
10 5. A method according to claim 4, wherein, if the requested number cannot be allocated to the connection, another frequency is selected.

15 6. A method according to any one of the preceding claims, wherein the steps are performed for each frequency according to a priority order list, until a frequency is found on which the connection request can be fulfilled, or until the last frequency has been examined.

20 7. A method according to claim 6, wherein, if no frequency is found on which the connection request can be fulfilled, the best possible assignment of channels is made.

8. A method according to claim 6, wherein, if no frequency is found on which the connection request can be fulfilled, the connection is denied.

25 9. A method according to claim 6, wherein, if no frequency is found on which the connection request can be fulfilled, the connection is assigned to channels that may not normally be allocated to packet switched connections.



10. A method according to any one of the preceding claims comprising the steps of, if a circuit switched connection is requested,

checking if the requested number of channels are available among the channels that may not be used for packet switched connections and, if so, assigning the requested number of channels among these channels to the connection.






- 5 11. A method according to claim 8, wherein, if the requested number of channels are not available among the channels that may not be used for packet switched connections, the necessary number of channels that may be used for packet switched connections are allocated to the circuit switched connection.
- 10 12. A method according to claim 9, wherein, if no idle channels are available for a requested circuit switched connection, one or more packet switched connections are disconnected to make idle channels for the circuit switched connection.
- 15 13. A method according to any one of the preceding claims, wherein the maximum number of channels ( $TS_{MAX}$ ) that may be allocated to packet switched connections and/or the number of connections ( $NU_{MAX}$ ) that may be assigned to each channel may be set individually for each frequency.
- 20 14. A control node in a mobile telecommunications system characterized in that it comprises
- memory means holding a values ( $TS_{MAX}$ ,  $NU_{MAX}$ ) specifying a maximum number of channels that may be allocated to packet switched connections for each frequency and a maximum number of connections that may be assigned to one channel, respectively;
  - 25 - means for, when a packet switched connection is requested:
    - checking if the maximum number ( $TS_{MAX}$ ) of channels have been allocated and, if not, allocating the available channels to the connection;
    - if more channels were requested, assigning other channels among the channels that may be allocated to packet switched connections to the requested packet
  - 30 switched connection.

15. A control node according to claim 14, arranged to, if the maximum number ( $TS_{MAX}$ ) of channels have been allocated:  
check if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to  
5 each of the channels among the channels that may be allocated to packet  
switched connections, and, if not, allocate the channels having the fewest connections to the requested connection.
16. A control node according to claim 15, arranged to, if the maximum number  
10 ( $NU_{MAX}$ ) of connections have been assigned to each of said channels, select another frequency.
17. A control node according to claim 14, arranged to,  
if the maximum number ( $TS_{MAX}$ ) of channels have been allocated:  
15 check if the maximum number ( $NU_{MAX}$ ) of connections have been assigned to  
each of the channels among the channels that may be allocated to packet  
switched connections, and, if not,  
check if the requested number of channels can be allocated to the connection and,  
if so,  
20 assign the channels having the fewest connections to the requested connection.



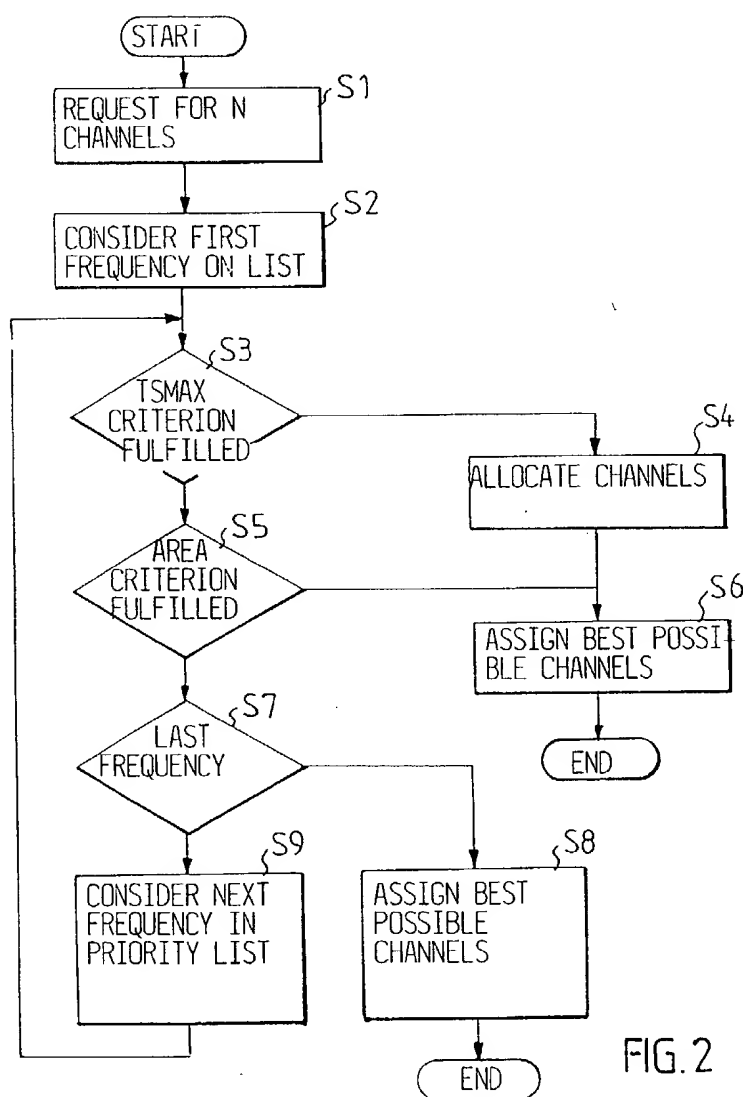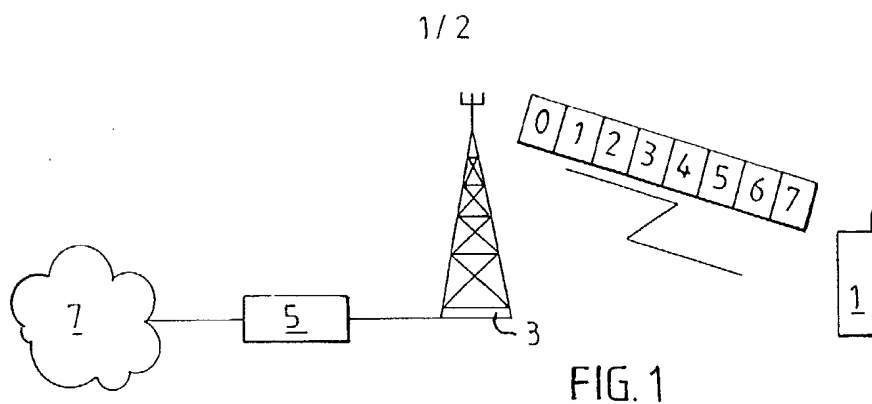

2/2

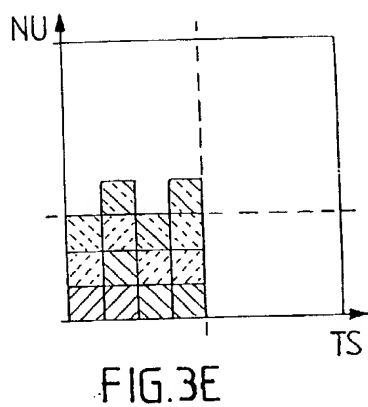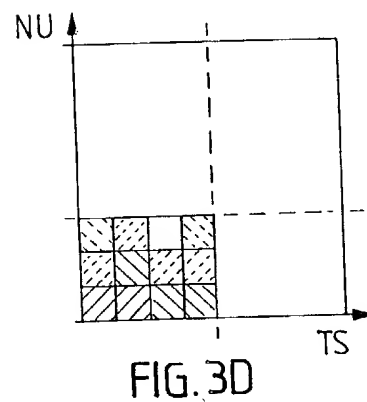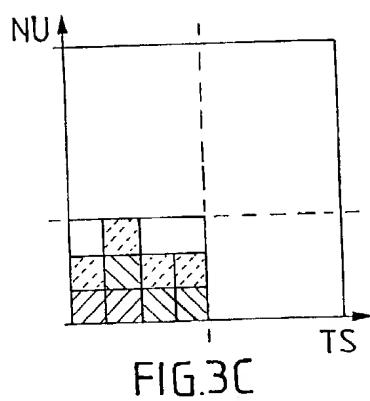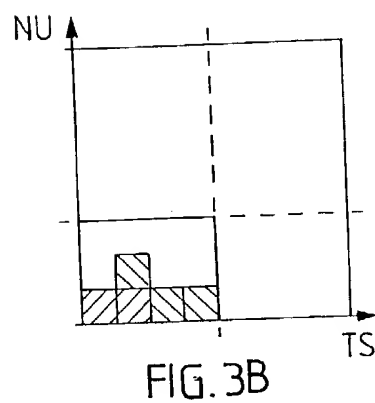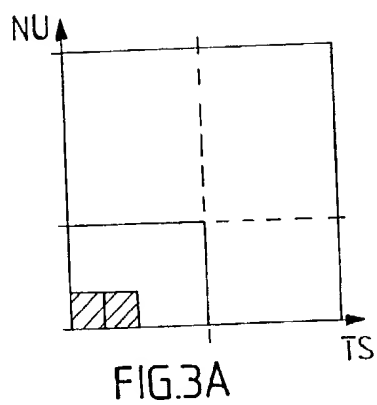

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/01080

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5729534 A (HARRI JOKINEN ET AL), 17 March 1998 (17.03.98), column 1, line 56 - column 3, line 5  --	1-17
A	US 5528664 A (ARUNAS G. SLEKYS ET AL), 18 June 1996 (18.06.96), abstract  --	1-17
A	EP 0168927 A2 (STANDARD TELEPHONES AND CABLES PUBLIC LIMITED COMPANY), 22 January 1986 (22.01.86), page 2, line 30 - page 3, line 17  -- -----	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

1 December 1999

Date of mailing of the international search report

06-12-1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson/cs

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT  
Information on patent family members

02/11/99

International application No.

PCT/SE 99/01080

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5729534 A	17/03/98	AU 692036 B	28/05/98
		AU 4392796 A	07/08/96
		CN 1168216 A	17/12/97
		DE 19543845 A	11/07/96
		FI 2058 U	22/08/95
		FI 950097 A,V	10/07/96
		FR 2729269 A	12/07/96
		GB 2296844 A,B	10/07/96
		GB 9600378 D	00/00/00
		IT 1281596 B	20/02/98
		IT MI960017 D	00/00/00
		JP 10512724 T	02/12/98
		NL 1002023 A,C	00/00/00
		SE 9600060 A	10/07/96
		WO 9622665 A	25/07/96
US 5528664 A	18/06/96	US 5396539 A	07/03/95
		CA 2063901 A	26/09/92
EP 0168927 A2	22/01/86	GB 2162022 A,B	22/01/86
		JP 61035648 A	20/02/86
		US 4707826 A	17/11/87